


# 3724 Dual 1x30 FET Multiplexer Card

## 60 differential channels, automatic CJC with 3724-ST accessory

### Datasheet

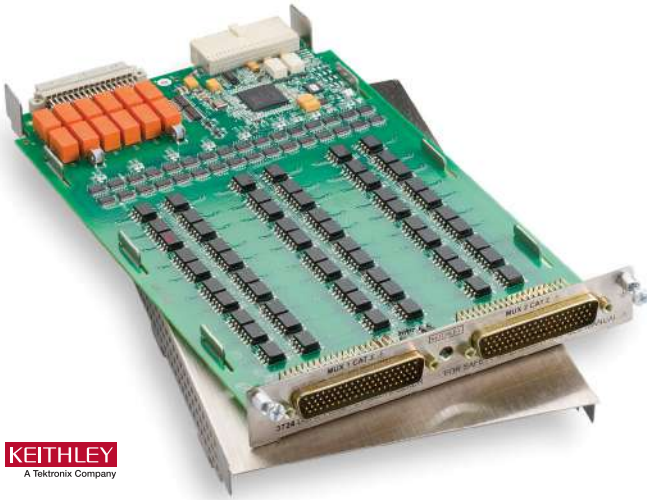


**KEITHLEY**  
A Tektronix Company

The 3724 provides two independent banks of solid-state relays arranged as 1x30 two-pole multiplexers that are ideal for high reliability, high speed multipoint measurement applications including temperature. The two banks can automatically be connected to the Series 3700A mainframe backplane and optional DMM through the analog backplane connection relays. This connection allows the mainframe to reconfigure the card to a single 1x60 two-pole multiplexer or to enable card-to-card expansion for even larger configurations.

#### Key Features

- 60 two-pole or 30 four-pole solid-state channels
- Scanning speeds greater than 1250 channels/second (switch only)
- Optically isolated, solid-state FET relays provide unlimited contact life
- 200 V, 0.1 A switch/carry signal capacity; 800mW
- Automatic CJC for temperature measurements when used with 3724-ST accessory
- Analog backplane connection relays provide easy bank and card interconnections
- Screw terminal connections provided with removable 3724-ST accessory
- Ideal for maintenance-free, long-life thermocouple temperature measurements
- Perfect for EV battery cell voltage monitoring

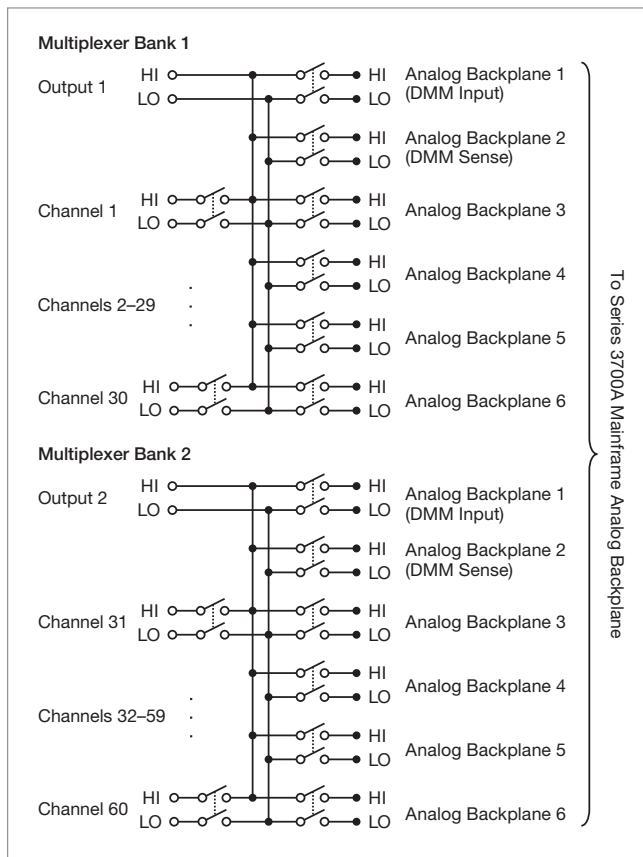

The solid-state FET relay technology supports fast switching times with scanning rates of greater than 1250 channels/second and provides unlimited contact life. In addition, the 3724 supports thermocouple temperature measurements when used with the 3724-ST (screw terminal) accessory providing automatic cold junction compensation (CJC).

The 3724 uses two 78-pin male D-sub connectors for signal connections. For screw terminal or automatic CJC, use the detachable 3724-ST accessory.

## 3724 Specifications

<b>Multiplexer Configuration</b>	Two independent 1x30, 2-pole multiplexers. Banks can be connected together via relay creating a single 1x60 multiplexer. Banks can be isolated from the backplane by relays. Card can be configured for 2- and 4-wire.
<b>Contact Configuration</b>	2-pole form A.
<b>Connector type</b>	Two 78-pin male D-shells.
<b>3724-ST Screw Terminal Option</b>	#22AWG typical wire size with 0.062 inch O.D. 124 conductors maximum. 16 AWG maximum wire size with 0.092 inch O.D. 36 conductor per card maximum.
<b>Maximum Signal Level</b>	200 V DC or 141 V RMS between any terminal, 0.1 A switched (0.1 A carry), 800 mW.
<b>Common Mode Voltage</b>	300V DC or RMS between any terminal and chassis.
<b>Volt-Hertz Limit</b>	10 <sup>7</sup> .
<b>Contact Life</b>	<b>Solid State:</b> > unlimited. <b>EMR (Backplane):</b> >1x10 <sup>8</sup> operations @ 5 V, 10 mA. 1x10 <sup>5</sup> operations @ max. signal level.

		Dual 1x30 <sup>1</sup>	Single 1x60 <sup>1, 2</sup>
Channel Resistance		<62 Ω (54 Ω @ 23°C)	<64 Ω (58 Ω @ 23°C)
Contact Potential (differential)		<±2 μV	<±2.5 μV
Offset Current		<10 nA (<±100 pA @ 23°C/60% R.H.)	<10 nA (<±100 pA @ 23°C/60% R.H.)
Isolation	Differential	10 <sup>9</sup> Ω, 500 pF	10 <sup>9</sup> Ω, 1100 pF
	Bank-Bank	10 <sup>9</sup> Ω, 100 pF	—
	CH-CH	10 <sup>9</sup> Ω, 125 pF	10 <sup>9</sup> Ω, 125 pF
	Common Mode	10 <sup>9</sup> Ω, 150 pF	10 <sup>9</sup> Ω, 700 pF
Crosstalk CH-CH	300 kHz	-40 dB	-40 dB
	1 MHz	-30 dB	-30 dB
Bandwidth		2 MHz	1 MHz

### Notes

1. Connections made using 3724-ST.
2. 3706A mainframe with all DMM backplane relays disconnected. Maximum two card backplane relays closed.

## 3724 Card/3706A Multimeter Condensed Specifications

### Temperature

Displayed in °C, °F, or K. Exclusive of probe errors.

Displayed in °C, °F, or K. Exclusive of probe errors.

### Thermocouples (accuracy based on ITS-90)

Type	Range	Resolution	90 Day/1 Year, 23°C ± 5°
J	-150 to +760°C	0.001°C	1.0°C
K	-150 to +1372°C	0.001°C	1.0°C
N	-100 to +1300°C	0.001°C	1.0°C
T	-100 to +400°C	0.001°C	1.0°C
E	-150 to +1000°C	0.001°C	1.0°C
R	+400 to +1768°C	0.1°C	1.8°C
S	+400 to +1768°C	0.1°C	1.8°C
B	+1100 to +1820°C	0.1°C	1.8°C

### DC Specifications

#### 3724 Card/3706A Multimeter Uncertainty Specifications

Function	Range	Notes
Voltage	All	Add 4.5 $\mu$ V to PPM "of range"
Resistance	100 k $\Omega$	Add 8 PPM to "of reading"
Resistance	1 M $\Omega$	Add 80 PPM to "of reading"
Resistance	10 M $\Omega$	Add 250 PPM to "of reading"
Resistance	100 M $\Omega$	Add 5000 PPM to "of reading"
Resistance 2-wire	1 k $\Omega$ through 100 M $\Omega$	Add 1.2 $\Omega$ (with REL) to PPM "of range" Add 64 $\Omega$ (without REL) to PPM "of range"
Resistance 4-wire and Dry Circuit	1 $\Omega$ , 10 $\Omega$ , and 100 $\Omega$	Ranges Not Available (maximum lead resistance exceeded, see manual for measurement considerations)

**Conditions** 1 PLC or 5 PLC.

**Accuracy**  $\pm$ (ppm of reading + ppm of range) (ppm = parts per million; e.g., 10 ppm = 0.001%).

## General

<b>ACTUATION TIME</b>	<0.2 ms.	
<b>Temperature Accuracy Using Automatic CJC with 3724-ST Accessory</b>	1°C for J, K, T, and E type (see mainframe specification for details).	
<b>Relay Type</b>	Optically isolated FET.	
<b>Relay Drive Scheme</b>	Direct.	
<b>Interlock</b>	Backplane relays disabled when interlock connection removed.	
<b>Relay Drive Current</b>	4 mA.	
<b>Operating Environment</b>	Specified for 0°C to 50°C. Specified to 70% R.H. at 35°C.	
<b>Storage Environment</b>	-25°C to 65°C.	
<b>Weight</b>	1.13 kg (2.5 lbs.).	
<b>Safety</b>	Conforms to European Union Directive 73/23/EEC, EN61010-1.	
<b>EMC</b>	Conforms to European Union Directive 2004/108/EC, EN61326-1.	
<b>Typical Scanning Speeds, Switch Only<sup>1</sup></b>	Sequential scanning, single channel, immediate trigger advance >1250 ch/s.	
<b>Typical Scanning Speeds, With Measurements Into Memory<sup>2</sup></b>	<b>DCV (10 V range) or 2WΩ (1 kΩ range)</b>	>1000 ch/s.
	<b>Thermocouple</b>	>1000 ch/s.
	<b>3- or 4-Wire RTD</b>	>450 ch/s.
	<b>4-Wire Ω (1 kΩ range)</b>	>450 ch/s.
	<b>ACV (10 V, 400 Hz range)</b>	>1000 ch/s.
<b>Power Budget Information</b>	<b>Quiescent Power (mW)</b>	1150.
	<b>Channel Relay Power (mW) Each</b>	20.
	<b>Backplane Relay Power Consumption (mW) Each</b>	100.

See Chapter 8 of the Series 3700A user's manual for more detailed information.

### Notes

- Scanning script local to mainframe, within same bank, break before make.
- 3706A mainframe with autorange off, limits off, dmm.autodelay=0, dmm.autozero=0, 4½ digits (NPLC=.006), for ACV dmm.detectorbandwidth=300, for OHMs dmm.offsetcompensation=off, dmm.opendetector=off. Scanning script local to mainframe, sequential scan within same bank (2-pole) or card (4-pole), and break before make switching.

## Ordering Information

<b>3724</b>	Dual 1×30 FET Multiplexer Card
-------------	--------------------------------

## Available Accessories

<b>3720-MTC-3</b>	78-pin female-to-male D-sub Cable Assembly, 3 m (9.8 ft)
<b>3724-ST</b>	Screw Terminal Block (required for auto CJC thermocouple measurements)

## Available Services

<b>3724-3Y-EW-STD</b>	1-year factory warranty extended to 3 years from date of shipment
<b>3724-5Y-EW-STD</b>	1-year factory warranty extended to 5 years from date of shipment
<b>C/3724-3Y-DATA</b>	3 (Z540-1 compliant) calibrations within 3 years of purchase*

\*Not available in all countries

## Contact Information:

<b>Australia</b>	1 800 709 465
<b>Austria*</b>	00800 2255 4835
<b>Balkans, Israel, South Africa and other ISE Countries</b>	+41 52 675 3777
<b>Belgium*</b>	00800 2255 4835
<b>Brazil</b>	+55 (11) 3530-8901
<b>Canada</b>	1 800 833 9200
<b>Central East Europe / Baltics</b>	+41 52 675 3777
<b>Central Europe / Greece</b>	+41 52 675 3777
<b>Denmark</b>	+45 80 88 1401
<b>Finland</b>	+41 52 675 3777
<b>France*</b>	00800 2255 4835
<b>Germany*</b>	00800 2255 4835
<b>Hong Kong</b>	400 820 5835
<b>India</b>	000 800 650 1835
<b>Indonesia</b>	007 803 601 5249
<b>Italy</b>	00800 2255 4835
<b>Japan</b>	81 (3) 6714 3086
<b>Luxembourg</b>	+41 52 675 3777
<b>Malaysia</b>	1 800 22 55835
<b>Mexico, Central/South America and Caribbean</b>	52 (55) 88 69 35 25
<b>Middle East, Asia, and North Africa</b>	+41 52 675 3777
<b>The Netherlands*</b>	00800 2255 4835
<b>New Zealand</b>	0800 800 238
<b>Norway</b>	800 16098
<b>People's Republic of China</b>	400 820 5835
<b>Philippines</b>	1 800 1601 0077
<b>Poland</b>	+41 52 675 3777
<b>Portugal</b>	80 08 12370
<b>Republic of Korea</b>	+82 2 565 1455
<b>Russia / CIS</b>	+7 (495) 6647564
<b>Singapore</b>	800 6011 473
<b>South Africa</b>	+41 52 675 3777
<b>Spain*</b>	00800 2255 4835
<b>Sweden*</b>	00800 2255 4835
<b>Switzerland*</b>	00800 2255 4835
<b>Taiwan</b>	886 (2) 2656 6688
<b>Thailand</b>	1 800 011 931
<b>United Kingdom / Ireland*</b>	00800 2255 4835
<b>USA</b>	1 800 833 9200
<b>Vietnam</b>	12060128

\* European toll-free number. If not accessible, call: +41 52 675 3777

Rev. 02.2022



Find more valuable resources at [TEK.COM](http://TEK.COM)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

060822 SBG 1KW-73931-1

