

Anritsu envision : ensure

Microwave Universal USB Power Sensors

Low Cost, Compact, and Highly Accurate Power Sensors
for RF and Microwave Applications

MA24208A

True-RMS, 10 MHz to 8 GHz

MA24218A

True-RMS, 10 MHz to 18 GHz



Introduction

The MA24208A and MA24218A Universal USB Power sensors are designed to provide accurate average power measurements from 10 MHz to 8 GHz and 18 GHz, respectively, over 80 dB of dynamic range. The sensors employ a patented “triple path” architecture that provides True-RMS measurements over the entire frequency and dynamic range (similar to thermal sensors), enabling users to make highly accurate average power measurements for CW, multi-tone, and digitally modulated signals up to 18 GHz.

Features and Benefits

- Broad Frequency Range (10 MHz to 18 GHz): Ideal for general purpose, aerospace and defense, satellite and wireless communications applications
- True RMS Measurements over 80 dB Dynamic Range: Enables average power measurement on CW, multi-tone, and digitally modulated signals - independent of modulation bandwidth
- Best-in-Class Damage Protection (+30 dBm CW, +34 dBm peak < 10 μ s): Protects instrumentation investment
- No Zeroing Required (for signals > -45 dBm) and Elimination of 1 mW Reference Calibration: Reduces test time and handling in production while maintaining absolute accuracy
- Advanced Trigger Capabilities: Facilitates time dependent power measurements (for example, GSM, WiMAX, TD-SCDMA, and LTE)
- NIST Traceable Calibration: Provides high-accuracy measurements
- Easy to Use with PC or Select Anritsu Handheld Instruments: No benchtop power meter unit needed
- Silicone Protective Covering (removable): Provides additional field durability
- External Trigger Latching: For pulses as narrow as 20 ns



MA24208A and MA24218A Universal USB Power Sensors

Table of Contents

Definitions 3
 Sensor Specifications 4
 Measurement Uncertainty 5
 PowerXpert™ 6
 General 7
 Operational Requirements 7
 Regulatory Compliance 7
 Ordering Information 8
 Optional Accessories 8

Definitions

All specifications and characteristics apply under the following conditions, unless otherwise stated:

Warm-Up Time	60 minutes
Operating Temperature Range	0 °C to 50 °C
Characteristic Performance	Characteristic specifications are not tested and are not warranted.
ISO GUM Measurement Uncertainty	Zero and Noise uncertainty expressed with three sigma confidence level. Average and Relative Power uncertainty expressed with two sigma confidence level.
Calibration Cycle	Anritsu recommended calibration interval is 12 months. All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com
Notes	MA24208A and MA24218A sensors may have degraded performance when dropped without the removable protective covering. This cover is required for warranted operation.

Sensor Specifications

Frequency		MA24208A	10 MHz to 8 GHz		
		MA24218A	10 MHz to 18 GHz		
Power Measurement					
	Dynamic Range	-60 dBm to +20 dBm			
		≤150 MHz	>150 MHz to 2 GHz	>2 GHz to 12.4 GHz	>12.4 GHz to 18 GHz
	VSWR, max	1.17:1	1.12:1	1.22:1	1.25:1
	Measurement Range 1	+20 dBm to +4 dBm approximate			
	Measurement Range 2	<+4 dBm to -16 dBm approximate			
	Measurement Range 3	<-16 dBm to -60 dBm approximate			
		Auto and fixed ranging available			
	Damage Levels at RF Port	+30 dBm, ±20 V DC (+34 dBm peak < 10 μs pulse and 10 % duty cycle), minimum			
Response					
	Signal Channel Rise Time	8 μs characteristic			
	Sampling Rate	140 kS/s			
Trigger					
	Source ¹	Bus, Continuous, Internal, External			
	Arm Type (for Internal/External)	Auto, Single, Multiple, Standby			
Internal Trigger					
	Dynamic Range	-35 dBm to +20 dBm			
	Level Accuracy	±0.5 dB characteristic			
	Slope	Positive or Negative			
	Delay Range	-5 ms to +10 s			
	Delay Resolution	10 μs			
	Hysteresis	0 to 10 dB, with 0.1 dB resolution			
	Trigger Hold Off	0 to 10 sec, with 0.01 ms resolution			
External Trigger					
	External Trigger Input	MCX (female), 5.5 V maximum			
	Impedance	4 kΩ nominal			
	Type	TTL/CMOS			
	Slope	Positive or Negative			
	Delay Range	-5 ms to +10 s			
	Delay Resolution	10 μs			
	High Level Input Voltage	2.3 V min, 3.0 V max			
	Low Level Input Voltage	1.3 V min, 1.6 V max			
	Latency ²	7.1 μs max			
	Trigger Pulse Width	20 ns min			
	Trigger Repetition Period	7.1 μs min			
	Trigger Hold Off	0 s to 10 s with 0.01 ms resolution			

1. Bus trigger is not available in PowerXpert application.

2. Latency is defined as the time delay between the defined edge of the applied trigger and the sensor switching into the triggered state.

Measurement Uncertainty

Average Power (dB) ³	Over 0 °C to 50 °C ambient temperature range:								
	Range (dBm)	≤0.05 GHz		>0.05 to 2 GHz		>2 to 12.4 GHz		>12.4 to 18 GHz	
	-60 to <-16	0.14		0.14		0.14		0.17	
	-16 to <+4	0.14		0.14		0.13		0.13	
	+4 to +20	0.14		0.15		0.15		0.14	
	Over 20 °C to 30 °C ambient temperature range:								
	Range (dBm)	≤0.05 GHz		>0.05 to 2 GHz		>2 to 12.4 GHz		>12.4 to 18 GHz	
	-60 to <-16	0.13		0.12		0.14		0.14	
	-16 to <+4	0.11		0.10		0.13		0.11	
	+4 to +20	0.11		0.10		0.10		0.11	
Relative Power (dB) ³	≤0.05 GHz:								
	Range (dBm)	Over 0 °C to 50 °C			Over 20 °C to 30 °C				
		+4 to +20	-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16		
	-60 to <-16	0.14	0.13	0.03	0.08	0.09	0.03		
	-16 to <+4	0.14	0.04	0.13	0.06	0.03	0.09		
	+4 to +20	0.05	0.14	0.14	0.05	0.06	0.08		
	>0.05 GHz to 2 GHz:								
	Range (dBm)	Over 0 °C to 50 °C			Over 20 °C to 30 °C				
		+4 to +20	-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16		
	-60 to <-16	0.16	0.16	0.03	0.11	0.12	0.03		
	-16 to <+4	0.17	0.05	0.16	0.09	0.04	0.12		
	+4 to +20	0.06	0.17	0.16	0.06	0.09	0.11		
	>2 GHz to 12.4 GHz:								
	Range (dBm)	Over 0 °C to 50 °C			Over 20 °C to 30 °C				
		+4 to +20	-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16		
	-60 to <-16	0.16	0.16	0.04	0.12	0.14	0.04		
	-16 to <+4	0.17	0.05	0.16	0.10	0.04	0.14		
	+4 to +20	0.06	0.17	0.16	0.07	0.10	0.12		
	>12.4 GHz to 18 GHz:								
	Range (dBm)	Over 0 °C to 50 °C			Over 20 °C to 30 °C				
+4 to +20		-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16			
-60 to <-16	0.14	0.15	0.04	0.12	0.14	0.04			
-16 to <+4	0.11	0.06	0.15	0.10	0.05	0.14			
+4 to +20	0.06	0.11	0.14	0.06	0.10	0.12			
Zero ⁴	Range (dBm)	Set		Drift					
		Watts	dBm	Watts	dBm				
	-60 to <-16	3.32E-10	-64.78	3.44E-10	-64.64				
	-16 to <+4	3.87E-08	-44.12	4.29E-08	-43.67				
	+4 to +20	1.07E-06	-29.70	9.96E-07	-30.02				
	Noise ⁵	Range (dBm)		Watts					
-60 to <-16		1.23E-10							
-16 to <+4		1.01E-08							
+4 to +20		8.56E-07							
Effect of Digital Modulation ⁶	Range (dBm)		dB						
	-60 to <-16		-0.048 to 0.080						
	-16 to <+4		-0.038 to 0.088						
	+4 to +20		-0.055 to 0.067						

- Power uncertainty expressed with two sigma confidence level for CW measurement after zero operation Includes calibration factor and linearity over temperature uncertainties, but not the effects of mismatch, zero set and drift, or noise.
- Zero uncertainty expressed with three sigma confidence level. One hour warm-up followed by a Zero operation. Measured with 256 averages and 40 ms aperture and with the temperature kept within ±1 °C.
Zero Set: Average of the reported power over one hour.
Zero Drift: Two sigma value of the reported power over one hour.
- Two sigma noise at 10.2 seconds of integration time (integration time = aperture time x averaging number). Effect of noise can be reduced by increasing the number of averages and/or increasing the aperture time. Noise is inversely proportional to the square root of number of ADC samples used per measurement; the number of ADC samples per measurement is the product of the sample rate, aperture time, and number of averages used. Noise uncertainty is expressed with three sigma confidence level.
- Measurement error with reference to a CW signal of equal power and frequency between 20 °C to 30 °C in Normal mode and average power ≤+20 dBm. In general, the error caused by modulation depends on the peak to average power ratio and RF bandwidth of the signal.

PowerXpert™

PC Requirements (version 3.0 or greater)

Processor and RAM	Minimum: Equivalent to Intel® Pentium® III with 1 GB RAM or Intel® Pentium® IV with 512 MB RAM Recommended: Equivalent to Intel® Pentium® IV with 1 GB RAM
Operating System	Microsoft® Windows® 8, Windows® 7, and Windows® XP
Hard-Disk Free Space	100 MB minimum
Display Resolution	1024 × 768 minimum
Interface	USB 2.0 high speed

System

Measurand	Average power
Measurement Resolution	0.01 dB max via PowerXpert™, 0.001 dB max via remote command
Offset Correction ⁷	-100 dB to +150 dB
Averaging Type	Auto, Manual Moving, Repeat
Number of Averages (Manual) ⁸	1 to 65,536
Auto Average Resolution ⁹	1 dB, 0.1 dB, 0.01 dB
Auto Average Source	Timeslot Number: 1 to 128 Scope Data Point Number: 1 to 16,384

Continuous Average Mode

Duty Cycle Correction	0.01 % to 100 %
Aperture Time	0.01 ms to 1 s
Measurement Time ¹⁰	$N \times (\text{aperture time} \times C_t) + 0.375 \text{ ms} + T_{com}$ Continuous: >1,600 readings/s (minimum aperture, one average) Buffered: >11,000 readings/s (minimum aperture, one average)
Buffer Size	8192

Scope Mode

Capture Time	0.01 ms to 1 s
Data Points	1 to 16,384
Resolution	0.01 ms max
Measurement Time ¹¹	$N \times (\text{capture time} \times C_t) + (P_n \times 0.042 \text{ ms}) + T_{com}$

Timeslot Mode

Maximum Number of Slots	128
Slot Width	0.01 ms to 100 ms
Maximum Capture Time	1000 ms (slot width x number of slots)
Resolution	0.01 ms max via remote command 0.01 ms max via PowerXpert™
Exclusion Periods	Start Exclusion: 0 ms to 10 ms End Exclusion: 0 ms to 10 ms
Measurement Time ¹²	$N \times (\text{slot width} \times \text{number of slots} \times C_t) + (P_n \times 0.064 \text{ ms}) + T_{com}$

List Mode

Number of Measurements	1 to 1000
Input Parameters	Frequency (GHz), aperture time (ms), averages


7. Offset correction feature is available only through the PowerXpert application. There is no remote command for it in the sensor firmware.
8. Maximum number of averages allowed in Continuous Average mode and Timeslot mode is 65,536. In Scope mode, the maximum number of averages is equal to 16,777,216 divided by the number of data points.
9. Averaging resolution of 0.001 dB is not available with the PowerXpert application. It is defined as the place after the decimal to which the reading becomes stable. For example, if 0.01 is selected, then the reading will typically be stable within ±0.01 dB. Please refer to the remote operation chapter in the user guide for information regarding access to this feature.
10. Speed is defined as the data throughput at the "A" end of the USB A to Micro-B Cable (p/n 2000-2010-R), where:
Number of Repeat Averages = N (N = 1 for moving average mode)
Capture Time Coefficient = $C_t = 1.62$
Command Processing Time = $T_{com} = 0.2 \text{ ms}$
Speed may vary depending on the speed of and load on the CPU controlling the sensor. Specified results obtained with Intel® Core™ i5-3550 CPU running at 3.30 GHz
11. Speed is defined as the data throughput at the "A" end of the USB A to Micro-B Cable (p/n 2000-2010-R), where:
Number of Repeat Averages = N (N = 1 for moving average mode)
Capture Time Coefficient = $C_t = 1.645$
Number of Points = P_n
Command Processing Time = $T_{com} = 0.24 \text{ ms}$
12. Speed is defined as the data throughput at the "A" end of the USB A to Micro-B Cable (p/n 2000-2010-R), where:
Number of Repeat Averages = N (N = 1 for moving average mode)
Capture Time Coefficient = $C_t = 1.625$
Number of Points = P_n
Command Processing Time = $T_{com} = 0.29 \text{ ms}$

General

RF Connector	N male
Interface to Host	USB 2.0 high speed
Current Consumption	410 mA to 450 mA characteristic (20 °C to 30 °C)
Size	110 mm x 46 mm x 25.6 mm, excluding N connector and silicone protective covering
Weight	397 g (0.88 lb)
Warranty	1 year



N Type connector designed for use with a torque wrench ensuring repeatable connections

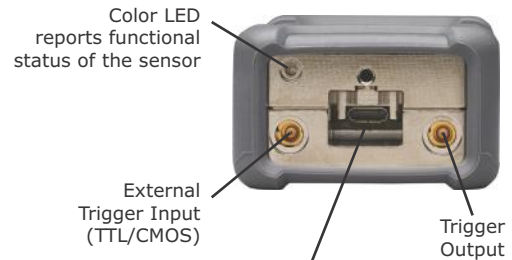

USB Micro-B port for connectivity to host (PC or Anritsu handheld instrument)

Operational Requirements

Tests were performed per MIL-PRF-28800F (Class 3).

Operating Temperature Range	0 °C to 50 °C
Storage Temperature Range	-40 °C to +71 °C
Relative Humidity (non-condensing)	45 % at 50 °C 75 % at 40 °C 95 % at 30 °C
Altitude	4600 m operational max
Shock	30 g half-sine, 11 ms duration
Vibration	Sinusoidal: 5 Hz to 55 Hz, 3 g max Random: 10 Hz to 500 Hz, 2.34 g rms Power Spectral Density: 0.01 g ² /Hz

Regulatory Compliance

European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004

Ordering Information

Available Models

MA24208A	8 GHz USB Universal Power Sensor
MA24218A	18 GHz USB Universal Power Sensor

Included Accessories

10585-00021	Quick Start Guide
2000-1605-R	1.5 m BNC(m) to MCX(m) cable
2000-2010-R	1.83 m USB A to Micro-B cable

Available Options

MA24208A-097	Option 97: ISO/IEC 17025 and ANSI/NCSL Z540-1 or ANSI/NCSLI Z540.3 (includes test report, uncertainty data, and accreditation symbol)
MA24208A-098	Option 98: Standard calibration ISO/IEC 17025 and ANSI/NCSL Z540-1
MA24208A-099	Option 99: Premium calibration ISO/IEC 17025 and ANSI/NCSL Z540-1 (includes test report and uncertainty data)
MA24218A-097	Option 97: ISO/IEC 17025 and ANSI/NCSL Z540-1 or ANSI/NCSLI Z540.3 (includes test report, uncertainty data, and accreditation symbol)
MA24218A-098	Option 98: Standard calibration ISO/IEC 17025 and ANSI/NCSL Z540-1
MA24218A-099	Option 99: Premium calibration ISO/IEC 17025 and ANSI/NCSL Z540-1 (includes test report and uncertainty data)

Optional Accessories

Calibrated Torque Wrenches

01-200	Calibrated torque wrench for N connector
01-204	Calibrated torque wrench for K and V connectors

Power Attenuators

3-1010-123	DC to 8.5 GHz, 30 dB, 50 W, 50 Ω, N(m) to N(f)
3-1010-124	DC to 8.5 GHz, 40 dB, 100 W, 50 Ω, N(m) to N(f)
3-1010-122	DC to 12.4 GHz, 20 dB, 5 W, 50 Ω, N(m) to N(f)
42N50-20	DC to 18 GHz, 20 dB, 5 W, 50 Ω, N(m) to N(f)
42N50A-30	DC to 18 GHz, 30 dB, 50 W, 50 Ω, N(m) to N(f)
41KB-3	DC to 26.5 GHz, 3 dB, 50 Ω, K(m) to K(f)
41KB-6	DC to 26.5 GHz, 6 dB, 50 Ω, K(m) to K(f)
41KB-10	DC to 26.5 GHz, 10 dB, 50 Ω, K(m) to K(f)
41KB-20	DC to 26.5 GHz, 20 dB, 50 Ω, K(m) to K(f)
43KB-3	DC to 26.5 GHz, 3 dB, 50 Ω, K(m) to K(f)
43KB-6	DC to 26.5 GHz, 6 dB, 50 Ω, K(m) to K(f)
43KB-10	DC to 26.5 GHz, 10 dB, 50 Ω, K(m) to K(f)
43KB-20	DC to 26.5 GHz, 20 dB, 50 Ω, K(m) to K(f)

Precision Coaxial Adapters

510-90-R	DC to 3.3 GHz, N(m) to 7/16 DIN(f)
510-91-R	DC to 3.3 GHz, N(f) to 7/16 DIN(f)
510-92-R	DC to 3.3 GHz, N(m) to 7/16 DIN(m)
510-93-R	DC to 3.3 GHz, N(f) to 7/16 DIN(m)
33N50B	DC to 18 GHz, N(f) to N(f)
33N50B	DC to 18 GHz, N(m) to N(f)
33N50B	DC to 18 GHz, N(m) to N(m)
34AN50	DC to 18 GHz, GPC-7 to N(m)
34ANF50	DC to 18 GHz, GPC-7 to N(f)
34NFK50	DC to 18 GHz, N(f) to K(m)
34NFKF50	DC to 18 GHz, N(m) to K(f)
34NK50	DC to 18 GHz, N(m) to K(m)
34NKF50	DC to 18 GHz, N(m) to K(f)
1091-26-R	DC to 18 GHz, N(m) to SMA(m)
1091-27-R	DC to 18 GHz, N(m) to SMA(f)
1091-80-R	DC to 18 GHz, N(f) to SMA(m)
1091-81-R	DC to 18 GHz, N(f) to SMA(f)



+1 (888) 880-6804
sales@testforce.com

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Americas Sales Company
450 Century Parkway, Suite 190
Allen, TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.
700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA L td.
200 Capability Green
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

List Revision Date: 20200602

• Sweden

Anritsu AB
Isafjordsgatan 32C
164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S
c/o Regus Winghouse, Ørestads Boulevard 73, 4th
floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Russia

Anritsu EMEA Ltd.
Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Moscow 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.
Representation Office in Spain
Paseo de la Castellana, 141.
Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• United Arab Emirates

Anritsu EMEA Ltd.
Dubai Liaison Office
902 Aurora Tower
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited
6th Floor, Indique ETA, No.38/4
Adjacent to EMC2, Doddanekundi, Outer Ring Road
Bengaluru 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.
11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.
Room 2701-2705, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.
Unit 1006-7, 10/F.
Greenfield Tower, Concordia Plaza
No. 1 Science Museum Road
Tsim Sha Tsui East, Kowloon
Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Ltd.
5FL, 235 Pangyojeok-ro
Bundang-gu, Seongnam-si
Gyeonggi-do 13494, South Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.
Unit 20, 21-35 Ricketts Road
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.
7F, No. 316, Sec. 1, NeiHu Rd. Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817