

---

# sbRIO-9638

# Specifications

---

2024-08-23



# Contents

sbRIO-9638 Specifications ..... 3

# sbRIO-9638 Specifications

## sbRIO-9638 Features

The sbRIO-9638 is an embedded CompactRIO Single-Board Controller that integrates a real-time processor, a user-reconfigurable FPGA, and digital I/O on a single printed circuit board (PCB). You can embed the sbRIO-9638 in high-volume OEM applications that require flexibility, reliability, and high performance. This controller features two Gigabit Ethernet connectors, two RS-232 serial ports, an RS-485 port, a CAN port, microSDHC, sixteen 16-bit analog inputs, four 16-bit analog outputs, and 28 5 V tolerant DIO ports.

- NI-DAQmx support for C Series modules and onboard I/O as well as I/O expansion using CompactDAQ or FieldDAQ
- TSN support on both Gigabit Ethernet ports

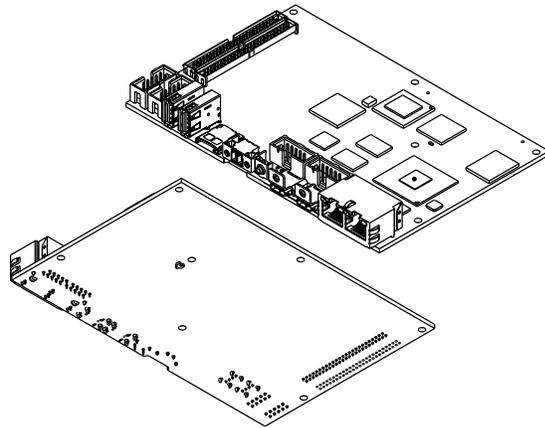


Figure 1. sbRIO-9638 Block Diagram

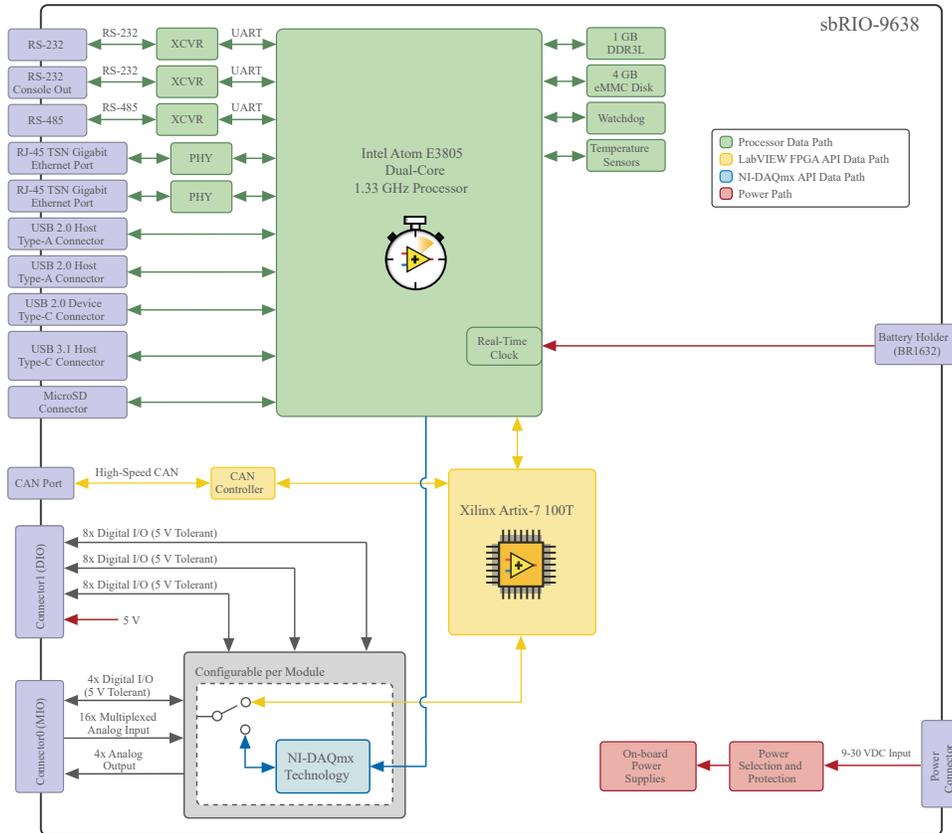


Table 1. CompactRIO Single Board Controller with DAQmx Model Comparison

Components	sbRIO-9603	sbRIO-9608	sbRIO-9609	sbRIO-9628	sbRIO-9629	s
<b>Part Number</b>						
Development Kit Part Number	787287-01	787288-01	787289-01	787296-01	787298-01	
OEM Kit Part Number	787287-02	787288-02	787289-02	787296-02	787298-02	
<b>Performance</b>						
Processor	Intel E3805 1.33 GHz Dual-Core	Intel E3845 1.91 GHz Quad-Core	Intel E3825 1.33 GHz Dual-Core	Intel E3845 1.91 GHz Quad-Core	1.33	
RAM (DDR3L)	1 GB	2 GB	1 GB	2GB		
Disk (eMMC)	4 GB					
Xilinx Artix-7 FPGA	XC7A75T	XC7A200T	XC7A100T	XC7A200T		

Components	sbRIO-9603	sbRIO-9608	sbRIO-9609	sbRIO-9628	sbRIO-9629	s
<b>Onboard Peripherals</b>						
Ethernet	2x IEEE 802.1AS-2011IEEE 1588-2008 (default end-to-end profile)					
USB Type-C port	USB 2.0 device					
USB Type-C port	1x USB 3.1 Gen1 Host					
DisplayPort Alt Mode	No		Yes			
USB Type-A port	—			2x USB 2.0 host		
SD port	—			microSDHC		
CAN port	1x CAN FD					
RS-232 port	1x			2x		
RS-485 port	—			1x		
<b>Onboard IO <sup>1</sup></b>						
Analog I/O	—			16 SE/8 Differential, 233 kS/s, 16-bit, ±10		
				4x AO 100 kS/s/ch, 16-bit, ±10 V		
Digital I/O (5 V tolerant)	—			4x DIO		
<b>RMC Connector</b>						
C Series	2x C Series interfaces <sup>2</sup>					
USB	USB 2.0 host					
DIO	96x DIO <sup>3</sup> , 3.3 V/2.5 V SE/Differential					
PCIe	1x PCIe x1 Gen 2.0					
SATA	1x SATA Gen 2.0					
Power	Optional Input Power from RMC (9 V to 30 V), Output power to RMC (3.3 V and 5 V, FPGA VIO)					

1. Programmable through LabVIEW FPGA and NI-DAQmx.
2. Programmable through LabVIEW FPGA and NI-DAQmx.
3. Programmable with LabVIEW FPGA only. Configurable as 4x RS-232 UARTs or 2x RS-485 UARTs via the sbRIO CLIP generator.

## Definitions

**Warranted** specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

**Characteristics** describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

## Conditions

Specifications are valid for -40 °C to 85 °C unless otherwise noted.

## Software



**Note** For minimum software support information, visit [ni.com/r/swsupport](https://ni.com/r/swsupport).

Supported operating system	NI Linux Real-Time (64-bit)
Supported C Series module programming modes	Real-Time (NI-DAQmx) mode Real-Time Scan (I/O Variables) mode LabVIEW FPGA mode
<b>Application software</b>	
LabVIEW <sup>4</sup>	LabVIEW 2019 or later,

4. LabVIEW FPGA Module is not required when using Real-Time Scan (I/O Variables) mode or Real-Time

	LabVIEW Real-Time Module 2019 or later, LabVIEW FPGA Module 2019 or later
Driver software	<a href="#">NI CompactRIO Device Drivers 19.5 or later</a>
<b>Planned Software Support</b>	
Support for CAN and CAN FD through dedicated CAN port	<a href="#">NI CompactRIO Device Drivers 20.5 or later</a>

To set up a C/C++ based toolchain, visit [ni.com/info](http://ni.com/info) and enter the info code `NIILRTCrossCompile` for more information.

## Processor

CPU	Intel Atom E3805
Number of cores	2
CPU frequency	1.33 GHz
On-die L2 cache	1 MB (shared)

## Memory

Density	1 GB
---------	------

(NI-DAQmx) mode. To program the user-accessible FPGA on the sbRIO-9638, the LabVIEW FPGA Module is required.

Type	DDR3L
Maximum theoretical data rate	8.533 GB/s

## Storage

Storage	4 GB
Storage type	Planar SLC NAND



**Note** Visit [ni.com/r/ssdbp](https://ni.com/r/ssdbp) for information about the life span of the nonvolatile memory and about best practices for using nonvolatile memory.

## Network/Ethernet Port

Number of ports	2
Network interface	10Base-T, 100Base-TX, and 1000Base-T Ethernet
Compatibility	IEEE 802.3
Communication rates	10 Mb/s, 100 Mb/s, 1000 Mb/s/auto-negotiated
Maximum cabling distance	100 m/segment

## Network Timing and Synchronization

Protocol	IEEE 802.1AS-2011 IEEE 1588-2008 (default end-to-end profile)
Network synchronization accuracy <sup>5</sup>	<1 $\mu$ s



**Note** The sbRIO-9638 employs time-aware transmission support. For more information about time-aware transmission support, visit [ni.com/r/timeaware](https://ni.com/r/timeaware).

## USB Ports

USB Type-C device port	
USB interface	USB 2.0, Hi-Speed
Maximum data rate	480 Mb/s
Maximum current (from host)	250 mA
USB Type-C host port	
USB interface	USB 3.1 Gen1, SuperSpeed
Maximum data rate	5 Gb/s

5. Network synchronization is system-dependent. For information about network synchronization accuracy, visit [ni.com/r/criosync](https://ni.com/r/criosync).

Maximum current	900 mA
<b>USB Type-A host port</b>	
Number of ports	2
USB interface	USB 2.0 Gen1
Maximum data rate	480 Mb/s
Maximum current	1.4 A, across both ports

## SD Association MicroSD Card Slot

MicroSD card support	MicroSD and MicroSDHC standards
Supported interface speeds	Full speed, high speed, UHS - I SDR50, and DDR50

## Internal Real-Time Clock

Accuracy	200 ppm; 40 ppm at 25 °C
----------	--------------------------

## CMOS Battery

Onboard battery type	BR1632
----------------------	--------

Typical battery life	
Power applied to power connector	10 years
Stored at temperatures up to 25 °C	3.0 years
Stored at temperatures up to 85 °C	2.25 years

## RS-232 (DTE) Serial Port

Number of interfaces	2 (ASRL1, ASRL2)
Baud rate support	Arbitrary
Maximum baud rate	921,600 b/s
Data bits	5, 6, 7, 8
Stop bits	1, 2
Parity	Odd, Even, Mark, Space
Flow control	RTS/CTS, XON/XOFF, DTR/DSR, None
Programming method	LabVIEW Real-Time (NI-VISA)

## RS-485 Serial Port

Number of interfaces	1 (ASRL3)
Maximum baud rate	921,600 b/s
Data bits	5, 6, 7, 8
Stop bits	1, 1.5, 2
Parity	Odd, Even, Mark, Space
Flow control	XON/XOFF
Wire mode	4-wire, 2-wire, 2-wire auto
Isolation voltage, port to earth ground	None

## Reconfigurable FPGA

FPGA type	Xilinx Artix-7 XC7A100T
Number of flip-flops	126,800
Number of 6-input LUTs	63,400

Number of DSP slices (18 × 25 multipliers)	240
Available block RAM	4,860 kbits
Number of DMA channels	16
Number of logical interrupts	32

## CAN

Number of interfaces	1 (CAN0)
Programming Method	LabVIEW FPGA
Onboard CAN transceiver	TI TCAN4550
<b>Maximum baud rate</b>	
CAN	1 Mb/s
CAN FD	5 Mb/s

## Analog Input Characteristics

Number of channels	16 single-ended or 8 differential
--------------------	-----------------------------------

ADC resolution	16 bits
Maximum aggregate sampling rate	233 kS/s
Input range	$\pm 10$ V, $\pm 5$ V, $\pm 2$ V, $\pm 1$ V
<b>Maximum working voltage (signal + common mode)</b>	
10 V range	$\pm 12.5$ V
5 V range	$\pm 10$ V
2 V range	$\pm 8.5$ V
1 V range	$\pm 8$ V
<b>Input impedance</b>	
Powered on	$> 1$ G $\Omega$ in parallel with 100 pF
Powered off/overload	2.3 k $\Omega$ minimum
<b>Overvoltage protection</b>	
Powered on	$\pm 25$ V, for up to 2 AI pins
Powered off	$\pm 15$ V

Table 2. Analog Input Accuracy


Calibration Interval	Measurement Conditions	Residual Gain Error	Residual Offset Error
2 years	Typical (25 °C, ±5 °C)	150 ppm of reading	60 ppm of range
	Maximum (-40 to 85 °C)	1,200 ppm of reading	1,000 ppm of range
15 years	Typical (25 °C, ±5 °C)	400 ppm of reading	60 ppm of range
	Maximum (-40 to 85 °C)	3,400 ppm of reading	1,000 ppm of range

Gain drift	6 ppm of reading/°C
Offset drift	4 ppm of range/°C
<b>AI noise</b>	
10 V range	175 $\mu$ Vrms
5 V range	90 $\mu$ Vrms
2 V range	40 $\mu$ Vrms
1 V range	25 $\mu$ Vrms
INL	±64 ppm of range, maximum
DNL	No missing codes guaranteed
<b>CMRR, DC to 60 Hz</b>	


10 V range	80 dB
5 V range	86 dB
2 V range	94 dB
1 V range	98 dB
Input bandwidth (-3 dB)	540 kHz, typical
Crosstalk (10 kHz)	-70 dB

### Typical performance


**Figure 2.** Common Mode Rejection Ratio versus Frequency

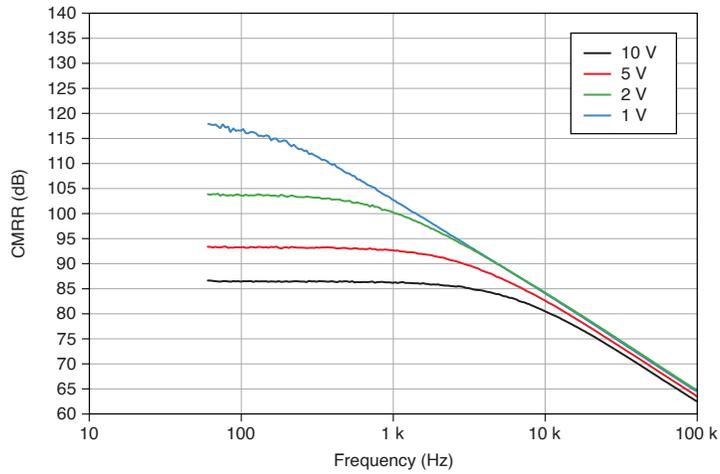

**Figure 3. Normalized Signal Amplitude versus Frequency**

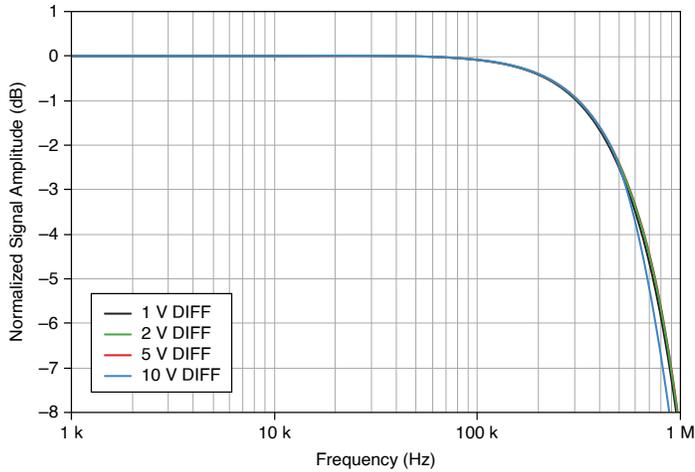

**Figure 4. Settling Error versus Time for Different Source Impedances**

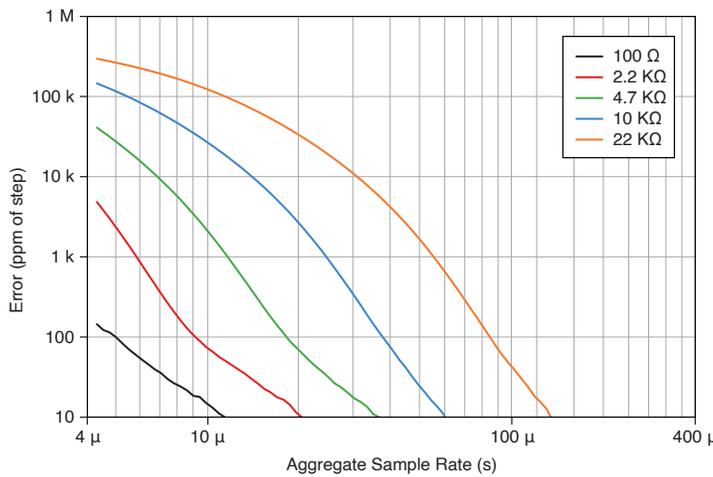

## Analog Output Characteristics

Number of channels	4
DAC resolution	16 bits

**Table 3. Analog Output Update Rate**

Number of Channels	Maximum Update Rate	Minimum Update Time
1	298 kS/s	3.35 μs
2	165 kS/s	6.05 μs

Number of Channels	Maximum Update Rate	Minimum Update Time
3	114 kS/s	8.75 $\mu$ s
4	86.9 kS/s	11.5 $\mu$ s

Range	$\pm 10$ V
<b>Overrange operating voltage</b>	
Minimum	10.4 V
Typical	10.5 V
Maximum	10.6 V
Output impedance	2 $\Omega$ typical
Current drive	$\pm 3$ mA/channel maximum
Protection	Short-circuit to ground
Power-on state <sup>6</sup>	0 V

**Table 4.** Analog Output Accuracy

Calibration Interval	Measurement Conditions	Residual Gain Error	Residual Offset Error
2 years	Typical (25 °C, $\pm 5$ °C)	450 ppm of reading	120 ppm of range
	Maximum (-40 to 85 °C)	1,200 ppm of reading	2,500 ppm of range

6. When the analog output initializes, a voltage glitch occurs for about 300 ns, peaking at -0.4 V, typical.

Calibration Interval	Measurement Conditions	Residual Gain Error	Residual Offset Error
15 years	Typical (25 °C, ±5 °C)	900 ppm of reading	120 ppm of range
	Maximum (-40 to 85 °C)	3,000 ppm of reading	2,500 ppm of range

Gain drift	12 ppm of reading/°C
Offset drift	12 ppm of range/°C
INL (Endpoint Fit)	±184 ppm of range, maximum
DNL	±16 ppm of range, maximum
Capacitive drive	1.5 nF, typical
Slew rate	4 V / μsec, typical
<b>Settling time (100 pF load to 320 μV)</b>	
FS step	50 μs
2 V step	12 μs
0.2 V step	9 μs

## 3.3 V Digital I/O on 50-Pin IDC Connector

Number of DIO channels	28
Maximum tested current per channel	$\pm 3$ mA
<b>Input logic levels</b>	
Input low voltage, $V_{IL}$	-0.3 V, minimum 0.8 V, maximum
Input high voltage, $V_{IH}$	2.0 V, minimum 5.25 V, maximum
<b>Output logic levels</b>	
Output high voltage, $V_{OH}$ when sourcing 3 mA	2.4 V, minimum 3.45 V, maximum
Output low voltage, $V_{OL}$ when sinking 3 mA	0.0 V, minimum 0.4 V, maximum

## Power Outputs on 50-Pin IDC Connector



**Caution** This output is protected by a fuse. Exceeding the power limits may cause this fuse to open.

+5 V power output

Output voltage	5 V $\pm$ 5%
Maximum current	1.5 A
Maximum ripple and noise	50 mV

## Real-Time (NI-DAQmx) Mode

The following specifications are applicable for modules and slots programmed in Real-Time (NI-DAQmx) mode. For more information about using modules in LabVIEW FPGA mode or Real-Time Scan (I/O Variables) mode, visit [ni.com/r/swsupport](http://ni.com/r/swsupport).

## Analog Input

Input FIFO size	253 samples per slot
Maximum sample rate	Determined by the C Series module or modules
Timing accuracy	50 ppm of sample rate
Timing resolution	12.5 ns
Number of channels supported	Determined by the C Series module or modules
Number of hardware-timed tasks	8



**Note** Maximum sample rate performance is dependent on type of installed C Series module and number of channels in the task.



**Note** Timing accuracy does not include group delay. For more information, refer to the documentation for each C Series module.

## Analog Output

Hardware-timed tasks	
Number of hardware-timed tasks	8
Number of channels supported	
Onboard regeneration	16
Non-regeneration	Determined by the C Series module or modules
Non-hardware-timed tasks	
Number of non-hardware-timed tasks	Determined by the C Series module or modules
Number of channels supported	Determined by the C Series module or modules
Maximum update rate	1.6 MS/s



**Note** Streaming applications are limited by system-dependent factors and the capability of C Series modules.

Timing accuracy	50 ppm of sample rate
-----------------	-----------------------

Timing resolution	12.5 ns
Waveform onboard regeneration FIFO	8,191 samples shared among channels used
Waveform streaming FIFO	253 samples per slot

## Digital Waveform

<b>Waveform acquisition (DI) FIFO</b>	
Parallel modules	255 samples per slot
Serial modules	127 samples per slot
<b>Waveform onboard regeneration (DO) FIFO</b>	
Parallel modules	2,047 samples shared among slots used
<b>Waveform streaming (DO) FIFO</b>	
Parallel modules	255 samples per slot
Serial modules	127 samples per slot
<b>Sample clock frequency</b>	
Digital input	0 MHz to 10 MHz
<b>Digital output</b>	

ot0:6 timing engine	0 MHz to 3.5 MHz
ot7 timing engine	0 MHz to 10 MHz



**Note** Streaming applications are limited by system-dependent factors and the capability of C Series modules.

Timing accuracy	50 ppm
Number of digital input hardware-timed tasks	8
Number of digital output hardware-timed tasks	8

## General-Purpose Counters/Timers

Number of counters/ timers	4
Resolution	32 bits
Counter measurements	Edge counting, pulse, semi-period, period, two-edge separation, pulse width
Position measurements	X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding

Output applications	Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling
Internal base clocks	80 MHz, 20 MHz, 13.1072 MHz, 12.8 MHz, 10 MHz, 100 kHz
External base clock frequency	0 MHz to 20 MHz
Base clock accuracy	50 ppm
Output frequency	0 MHz to 20 MHz
Inputs	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down
Routing options for inputs	Any module PFI, analog trigger, many internal signals
FIFO	Dedicated 127-sample FIFO

## Frequency Generator

Number of channels	1
Base clocks	20 MHz, 10 MHz, 100 kHz
Divisors	1 to 16 (integers)

Base clock accuracy	50 ppm
Output	Any module PFI terminal

## Module PFI

Functionality	Static digital input, static digital output, timing input, and timing output
Timing output sources	Many analog input, analog output, counter, digital input, and digital output timing signals
Timing input frequency	0 MHz to 20 MHz
Timing output frequency	0 MHz to 20 MHz



**Note** Actual available timing output source signals are dependent on type of installed C Series module.

## Digital Triggers

Source	Any module PFI terminal
Polarity	Software-selectable for most signals

Analog input function	Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Analog output function	Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Counter/timer function	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down

## Module I/O States

At power-on	Module-dependent. Refer to the documentation for each C Series module.
-------------	--

## Time-Based Triggers and Timestamps

Number of time-based triggers	5
Number of timestamps	6
<b>Analog input</b>	
Time-based triggers	Start Trigger, Sync Pulse
Timestamps	Start Trigger, Reference Trigger, First Sample
<b>Analog output</b>	
Time-based triggers	Start Trigger, Sync Pulse

Timestamps	Start Trigger, First Sample
<b>Digital input</b>	
Time-based triggers	Start Trigger
Timestamps	Start Trigger, Reference Trigger, First Sample
<b>Digital output</b>	
Time-based triggers	Start Trigger
Timestamps	Start Trigger, First Sample
<b>Counter/timer input</b>	
Time-based triggers	Arm Start Trigger
Timestamps	Arm Start Trigger
<b>Counter/timer output</b>	
Time-based triggers	Start Trigger, Arm Start Trigger
Timestamps	Start Trigger, Arm Start Trigger

## Power Requirements

The sbRIO-9638 requires a power supply connected to the power connector. Refer to the ***Connecting the sbRIO-96xx to Power*** section in the ***CompactRIO Single Board Controller with DAQmx Hardware Installation Manual*** on [ni.com/](http://ni.com/)

[manuals](#) for information about connecting the power supply.




**Notice** Exceeding the power limits may cause unpredictable device behavior.

Recommended power supply	
Development kit	NI PS-10 Desktop Power Supply (included in kit) Condor STD-24050 120 W, 24 V DC
OEM kit	55 W, 24 V DC, maximum
Voltage input range	9 V DC to 30 V DC
Reversed-voltage protection	30 V DC
Power consumption	55 W
Replacement battery	
Manufacturer	Rayovac
Model	BR1632
Cell chemistry system	Lithium Carbon Monofluoride (Li/CF)

# Physical Characteristics

Weight	157 g (5.5 oz)
--------	----------------

## sbRIO-9638 Dimensions

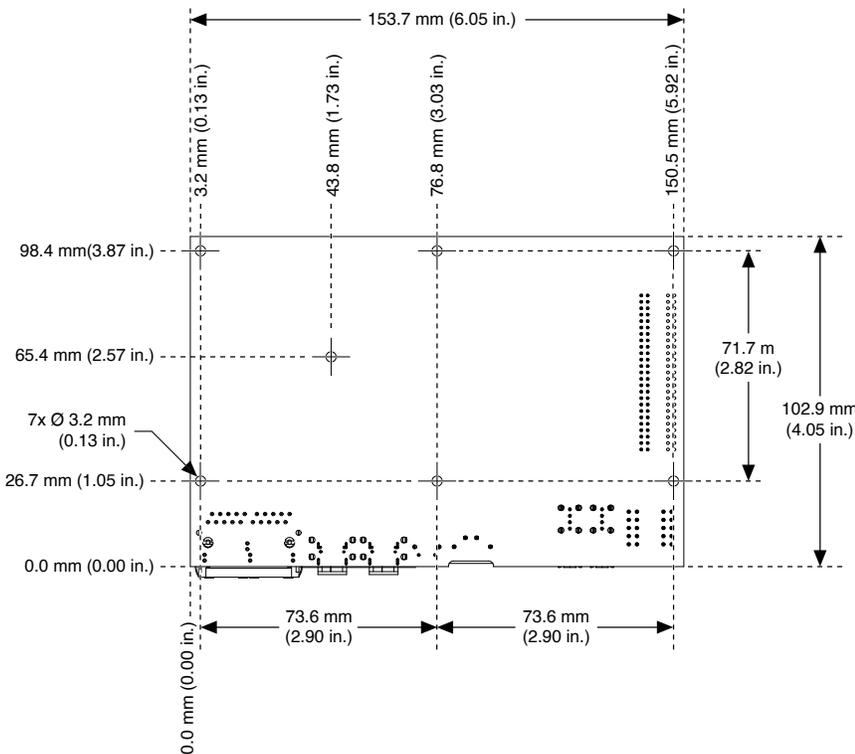

## Safety Voltages

Connect only voltages that are below these limits.

V terminal to C terminal	30 V DC, maximum, Measurement Category I
--------------------------	--

 **Caution** Do not connect the model to signals or use for measurements within Measurement Categories II, III, or IV.



**Attention** Ne connectez pas le modèle à des signaux et ne l'utilisez pas pour effectuer des mesures dans les catégories de mesure II, III ou IV.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as **MAINS** voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

## Environmental Guidelines



**Notice** This model is intended for use in indoor applications only.



**Notice** The OEM Kit may require a heat sink or air flow to remain within the maximum allowed temperature ranges. You can mount the Thermal Kit for CompactRIO Single Board Controller with NI-DAQmx heat spreader on the NI sbRIO model.



**Notice** The Development Kit must be used with the Thermal Kit for CompactRIO Single Board Controller with NI-DAQmx.



**Notice** The model's thermal performance is greatly influenced by several factors, including resource utilization, mounting, and adjacent power dissipation. These factors can substantially affect the achievable external ambient temperature at which the maximum local and reported temperatures are reached. NI recommends you validate your system to ensure local and reported temperatures remain within maximum allowed

temperature ranges. In some applications, additional thermal design may be necessary.

 **Notice** Exercise caution when designing an enclosure for the model. Auxiliary cooling may be necessary to keep the model within the specified operating temperature range.

 **Notice** For information about and examples of environmental and design factors that can affect the thermal performance of NI sbRIO systems, visit [ni.com/r/sbriocooling](https://ni.com/r/sbriocooling).

 **Notice** For model-specific guidelines about enabling proper thermal design, refer to the ***CompactRIO Single Board Controller with DAQmx Hardware Installation Manual*** on [ni.com/manuals](https://ni.com/manuals).

## Local Ambient Temperature

Local ambient temperature is the temperature measured directly adjacent to the model.



**Note** Operating temperature refers to the temperature of the room, environment, or enclosure in which an sbRIO-9638 is installed. The maximum operating temperature allowable for sbRIO-9638 is determined by the monitored battery temperature. Refer to the device ***Safety, Environmental, and Regulatory Information*** document on [ni.com/manuals](https://ni.com/manuals) for more information.



**Note** For more information about designing a thermal solution, validating temperature, and measuring both local ambient temperature and operating temperature, refer to the ***CompactRIO Single-BoardController with NI-DAQmx Hardware Installation Manual*** on [ni.com/manuals](https://ni.com/manuals).

## Environmental Characteristics


Local ambient temperature	-40 °C to 85 °C	
<b>Onboard sensor temperature</b>		
CPU	108 °C, maximum <sup>7</sup>	
FPGA	98 °C, maximum	
Primary System	85 °C, maximum	
Secondary System	85 °C, maximum	
Storage	-40 °C to 85 °C	



**Note** NI recommends verifying the maximum case temperatures for the following components when designing a custom heat spreader. Refer to the ***CompactRIO Single Board Controller with DAQmx Hardware Installation Manual*** on [ni.com/manuals](http://ni.com/manuals) for more information about validating the thermal characteristics of your system.

7. The CPU reduces its operating frequency when the die temperature reaches 108 °C. NI recommends keeping the die temperature below 108 °C to guarantee optimal performance. Refer to the ***CompactRIO Single Board Controller with DAQmx Hardware Installation Manual*** for information about monitoring the CPU die temperature.

**Figure 5.** sbRIO-9638 Component Locations

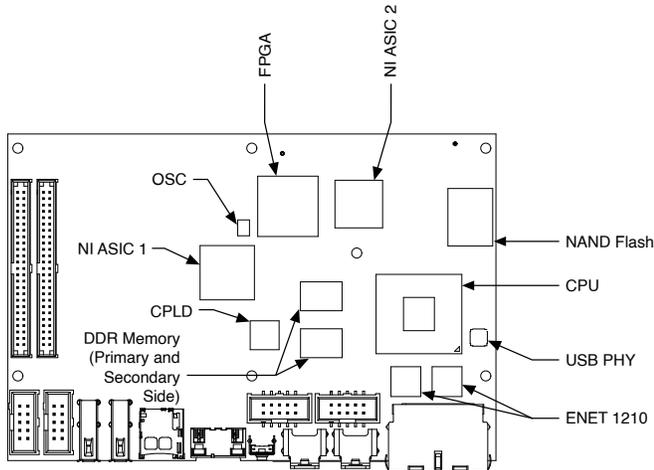

**Table 5.** Component Maximum Case Temperature

Component	Maximum Case Temperature
CPU	Validate digitally.
FPGA	Validate digitally.
CPLD	94 °C
NI ASIC 1	120 °C
NI ASIC 2	116 °C
DDR memory	95 °C
NAND Flash	91 °C
ENET I210	95 °C
USB PHY	120 °C
OSC	112 °C
Battery	85 °C

Humidity	
Operating	10% RH to 90% RH, noncondensing
Storage	5% RH to 95% RH, noncondensing

Pollution Degree	2
Maximum altitude	5,000 m

## Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

## Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Industrial immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-003: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use in non-residential locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or

medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Notice** For EMC declarations and certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

## Environmental Standards

This product meets the requirements of the following environmental standards for electrical equipment.

- IEC 60068-2-1 Cold
- IEC 60068-2-2 Dry heat

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)

## Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](http://ni.com/product-certifications), search by model number, and click the appropriate link.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy***

**Planet** web page at [ni.com/environment](http://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](http://ni.com/environment/weee).

## Battery Replacement and Disposal

-  **Battery Directive**—This product contains a long-life coin cell battery. If you need to replace it, use the Return Material Authorization (RMA) process or contact an authorized NI service representative. For more information about compliance with the EU Battery Directive 2006/66/EC about Batteries and Accumulators and Waste Batteries and Accumulators, visit [ni.com/environment/batterydirective](http://ni.com/environment/batterydirective).

## Battery Recycling

The model contains a replaceable battery. Products containing lithium must be disposed of or recycled in accordance with all local laws and site regulations. For more information about disposing of or recycling this device's battery, refer to [www.rayovac.com](http://www.rayovac.com).

## 电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

## NI Services

Visit [ni.com/support](http://ni.com/support) to find support resources including documentation, downloads, and troubleshooting and application development self-help such as tutorials and examples.

Visit [ni.com/services](https://ni.com/services) to learn about NI service offerings such as calibration options, repair, and replacement.

Visit [ni.com/register](https://ni.com/register) to register your NI product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

NI corporate headquarters is located at 11500 N Mopac Expwy, Austin, TX, 78759-3504, USA.