




Elektro-Automatik

testforce



DATASHEET

EA-PU 10000 4U

Programmable DC Power Supply

EA-PU 10000 4U 30 KW

Programmable DC power supply



Features

- Wide range input: 208 V - 480 V, $\pm 10\%$, 3ph AC
- Active Power Factor Correction, typical 0.99
- Very high efficiency of up to 96%
- High performance with up to 30 kW per unit
- Voltages from 0 - 60 V up to 0 - 2000 V
- Currents from 0 - 40 A up to 0 - 1000 A
- Flexible power regulated DC output stages (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16 bit ADCs and DACs, selection of voltage control speed: Normal, Fast, Slow
- Galvanically isolated Share-Bus for parallel operation of all power classes in the 10000 series
- Master-slave bus for parallel operation of up to 64 units of same type in all power classes of the 10000 series
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

Built-in interfaces

- USB
- Ethernet
- Analog
- Master-Slave bus
- Share Bus
- USB (front panel)

Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

Software

- EA-Power Control

Options

- Water Cooling in stainless steel
- Function generator

Technical data

General specifications	
AC input	
Voltage, Phases	380 V - 480 V $\pm 10\%$, 3ph AC (208 V - 240 V $\pm 10\%$, 3ph AC with derating to 18 kW)
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<10 mA
Phase current	≤ 56 A @ 400 V AC
Overvoltage category	2
DC output static	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant AC input voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (380 V - 480 V $\pm 10\%$ AC input voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CV	≤ 30 ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ $U_{Nominal}$
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant AC input voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (380 V - 480 V $\pm 10\%$ AC input voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CC	≤ 50 ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant AC input voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS current (0 - 100% load, constant AC input voltage and constant temperature)
Protective functions	
OVP	Overvoltage protection, adjustable 0 - 110% $U_{Nominal}$
OCP	Overcurrent protection, adjustable 0 - 110% $I_{Nominal}$
OPP	Overpower protection, adjustable 0 - 110% $P_{Nominal}$
OT	Overtemperature protection (DC output shuts down in case of insufficient cooling)
DC output dynamic	
Rise time 10 - 90% CV	≤ 10 ms
Fall time 90 - 10% CV	≤ 10 ms
Rise time 10 - 90% CC	≤ 2 ms
Fall time 90 - 10% CC	≤ 2 ms
Insulation	
AC input to DC output	3750 Vrms (1 minute, creepage distance >8 mm)
AC input to case (PE)	2500 Vrms
DC output to case (PE)	Depending on the model, see model tables
DC output to interfaces	1000 V DC (models up to 360 V output), 1500 V DC (models from 500 V output)
Interfaces digital	
Built-in, galvanically isolated	USB, Ethernet (100 MBit), USB front panel, all for communication
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
Interfaces analog	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$, 0 - 5 V: $\leq 0.4\%$
Device configuration	
Parallel operation	Up to 64 units of any power class in series 10000 start from 5 kW, with Master-Slave-Bus and Share-Bus

General specifications	
Safety and EMC	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class A CISPR 11, class A FCC 47 CFR part 15B, unintentional radiator, class A EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress Protection	IP20
Environmental conditions	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
Mechanical construction	
Cooling	Forced air flow from front to rear (temperature controlled fans), optional water cooling
Dimensions (W x H x D)	Enclosure: 19" x 4U x 668 mm (26.3 in)
Weight	50 kg (110 lb)
Weight with water cooling	56 kg (126 lb)

Technical specifications	PU 10060-1000	PU 10080-1000	PU 10200-420	PU 10360-240	PU 10500-180
DC output					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤25 mV (BWL 300 kHz)	≤25 mV (BWL 300 kHz)	≤40 mV (BWL 300 kHz)	≤55 mV (BWL 300 kHz)	≤70 mV (BWL 300 kHz)
Ripple in CV (pp)	≤320 mV (BWL 20 MHz)	≤320 mV (BWL 20 MHz)	≤300 mV (BWL 20 MHz)	≤320 mV (BWL 20 MHz)	≤350 mV (BWL 20 MHz)
Current range	0 - 1000 A	0 - 1000 A	0 - 420 A	0 - 240 A	0 - 180 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.003 Ω - 5 Ω	0.003 Ω - 5 Ω	0.0165 Ω - 25 Ω	0.05 Ω - 90 Ω	0.08 Ω - 170 Ω
Output capacitance	25380 μF	25380 μF	5400 μF	1800 μF	675 μF
Efficiency sink/source (up to)	95.1% *1	95.5% *1	95.3% *1	95.8% *1	96.5% *1
Insulation					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
Article numbers					
Standard	01113000	01113001	01113002	01113003	01113004
Standard + Water Cooling	01443001	01443002	01443003	01443004	01443005

*1 At 100% power and 100% output voltage
BWL = band width limit

Technical specifications	PU 10750-120	PU 10920-125	PU 11000-80	PU 11500-60	PU 12000-40
DC output					
Voltage range	0 - 750 V	0 - 920 V	0 - 1000 V	0 - 1500 V	0 - 2000 V
Ripple in CV (rms)	≤200 mV (BWL 300 kHz)	≤250 mV (BWL 300 kHz)	≤300 mV (BWL 300 kHz)	≤400 mV (BWL 300 kHz)	≤500 mV (BWL 300 kHz)
Ripple in CV (pp)	≤800 mV (BWL 20 MHz)	≤1200 mV (BWL 20 MHz)	≤1600 mV (BWL 20 MHz)	≤2400 mV (BWL 20 MHz)	≤3000 mV (BWL 20 MHz)
Current range	0 - 120 A	0 - 125 A	0 - 80 A	0 - 60 A	0 - 40 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.2 Ω - 370 Ω	0.25 Ω - 550 Ω	0.4 Ω - 650 Ω	0.8 Ω - 1500 Ω	1.7 Ω - 2700 Ω
Output capacitance	450 μF	100 μF	200 μF	75 μF	50 μF
Efficiency sink/source (up to)	96.5% *1	96.5% *1	95.8% *1	96.5% *1	96.5% *1
Insulation					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC
Article numbers					
Standard	01113005	01113006	01113007	01113008	01113009
Standard + Water Cooling	01443006	01443007	01443008	01443009	01443010

*1 At 100% power and 100% output voltage
BWL = band width limit

General

The DC power supplies in the PU 10000 series from EA Elektro-Automatik convert the energy from the grid into a regulated DC voltage with an efficiency up to over 96%. The PU 10000 series are three phase units which, together with the wide input range, allows use with practically all global mains voltages. The DC voltages and currents are determined by the application and the spectrum ranges from 0 - 60 V to 0 - 2000 V and from 0 - 40 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging) with a wide voltage and current range. To achieve higher power and current all units are equipped with a Master-Slave-Bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 3840 kW and 64000 A. Such a system works as a single unit and can use different power classes start from 5kW, only the voltage class must remain constant. In this way a user can construct a 150 kW system from two 60 kW 6U and one 30 kW 4U device from the PU 10000 range. Furthermore, typical laboratory functionality is provided. This includes alarm and warning management, various optional industrial interfaces, software solutions and many more functions.

AC connection


The DC power supplies in the PU 10000 series with 30 kW are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches with 3-phases from 208 - 240 V (with a derating to 18 kW) and 380 - 480 V. Hence the devices can be operated in the majority of global grids.

DC output

The output of the power supply PU 10000 4U with 30 kW with a DC voltage of 0 - 60 V up to 0 - 2000 V allows currents of 0 - 40 A up to 0 - 1000 A. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

DC connection

Connection of the DC output is via a copper rail on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

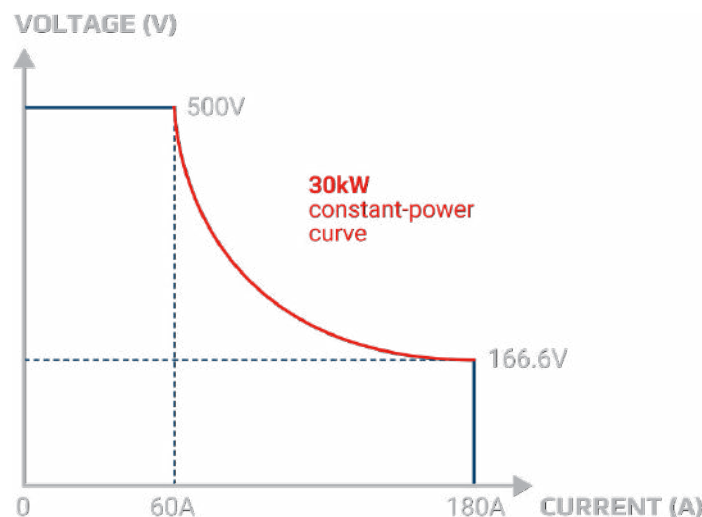

The principle of autoranging

„Autoranging“ is a term when a programmable DC power supply automatically offers a wide output range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

High performance systems

High power applications can be covered with high power systems of up to 1920 kW. These are achieved by using the DC outputs of multiple PU 10000 devices with vertical copper rails in parallel. Thus, a 19" cabinet with 42 U can provide a system with 300 kW occupying only 0.6 m² (6.5 sqft) of floor space. The Master-Slave bus allows for up to 13 cabinets with a maximum of 64 units with 30 kW each to behave as one unit.

Master-slave bus and Share Bus




If the integrated master-slave bus and Share bus are used, a multi device system behaves as a single device. The master-slave bus and Share bus are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and shown on the master device. Warnings and alarms of the slave devices are shown clearly in the display. The Share bus equal load distribution to the individual devices.




Example representation

In this illustration you can see a fully assembled and wired 240 kW system

Technical drawings PU 10000 4U ≤ 200 V

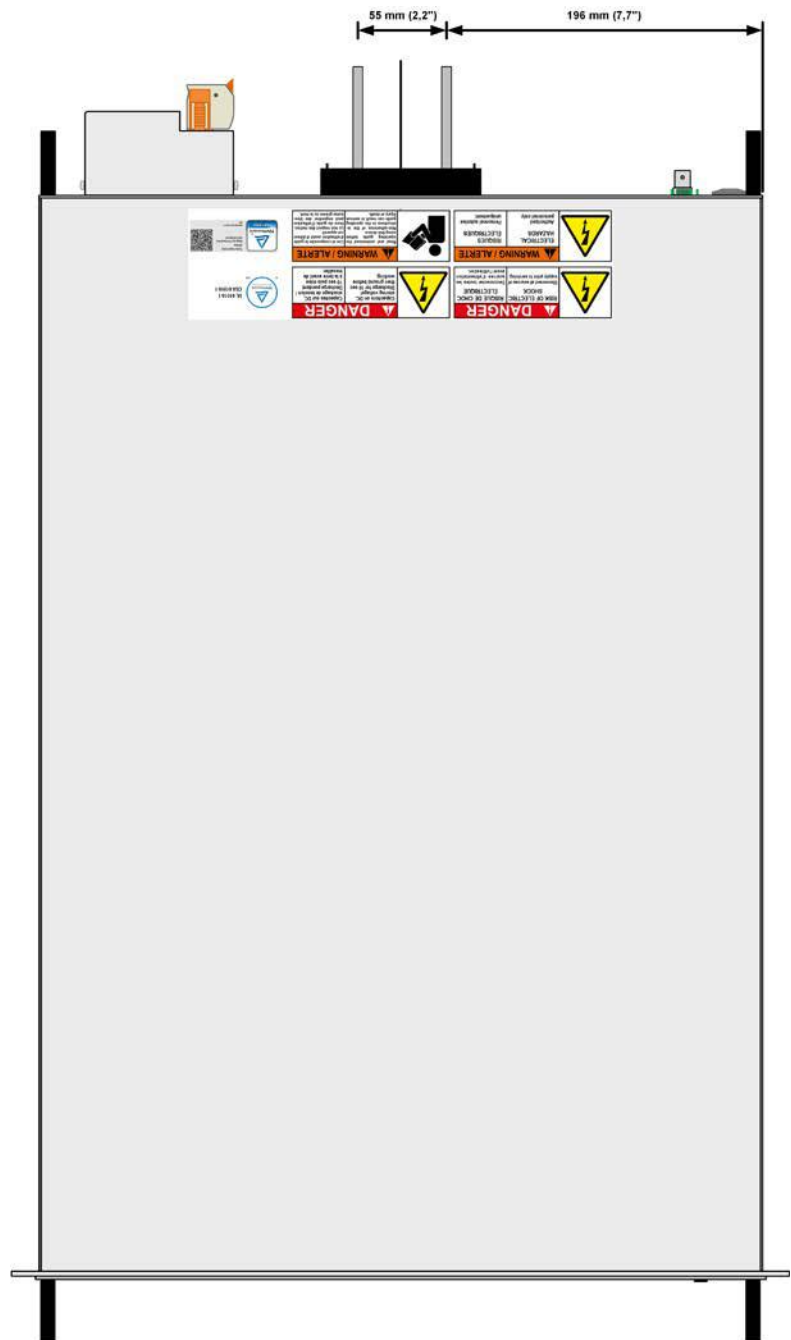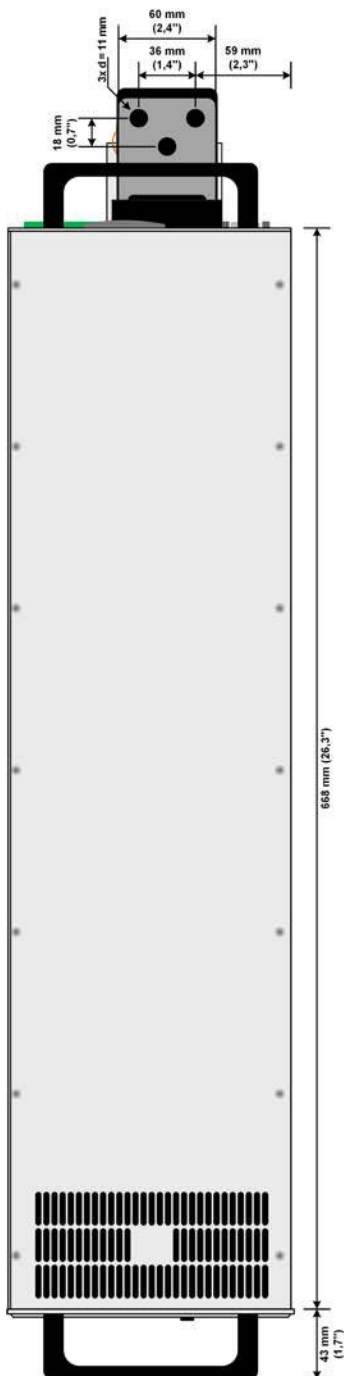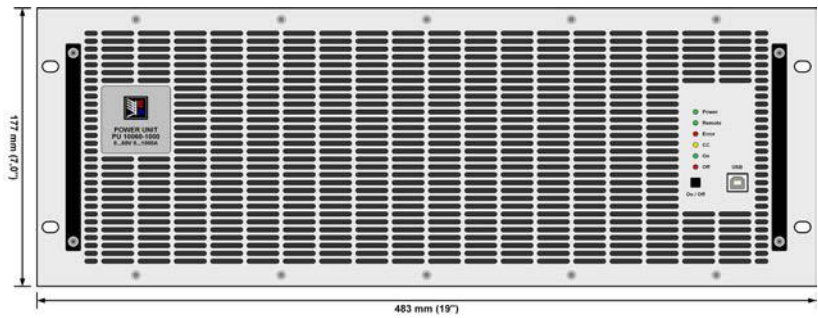


Front panel description PU 10000 4U

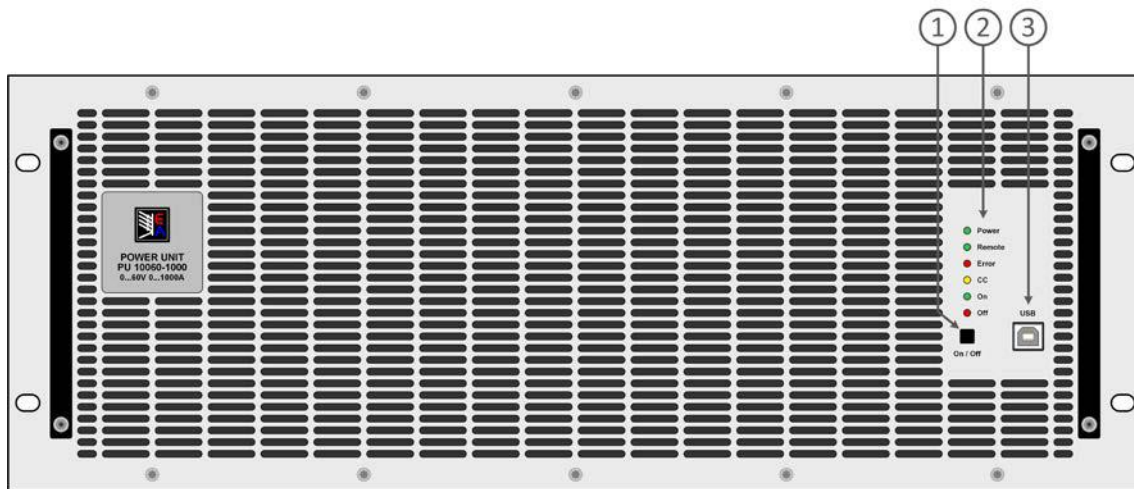




1. On / Off push-button
2. LED status display
3. USB Interface

Rear panel description PU 10000 4U ≤ 200 V

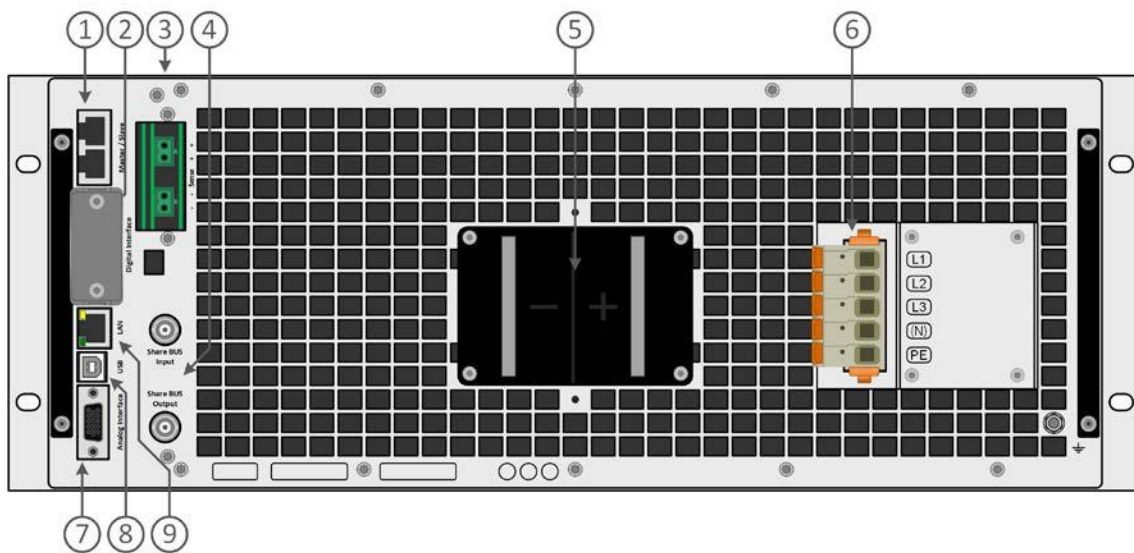


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC output connector (copper blades)
6. AC input connector
7. Connector (DB15 female) for isolated analog programming, monitoring and other functions
8. USB interface
9. Ethernet interface

Technical drawings PU 10000 4U ≥ 360 V

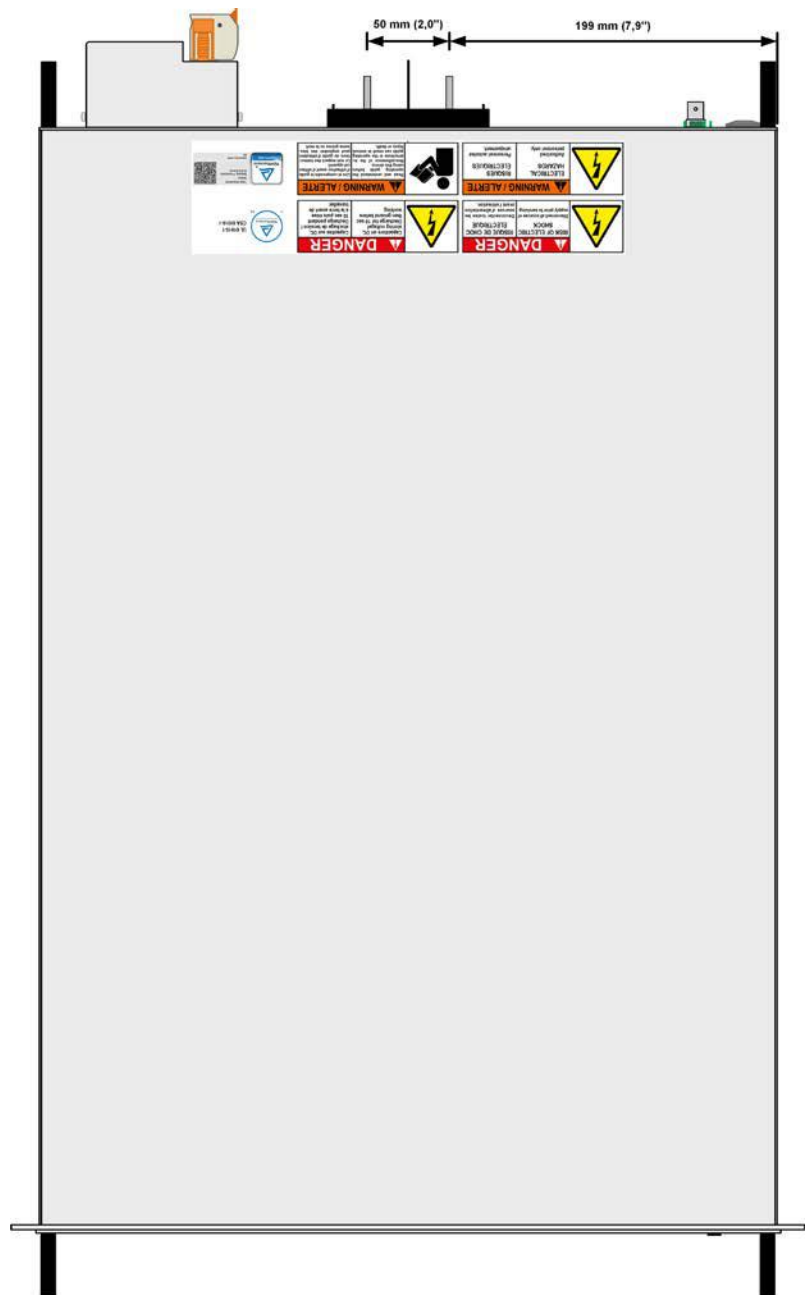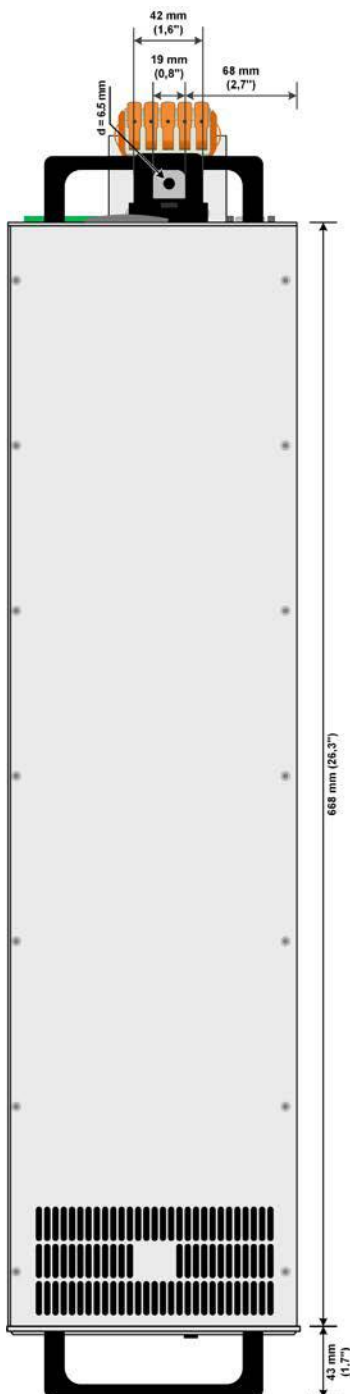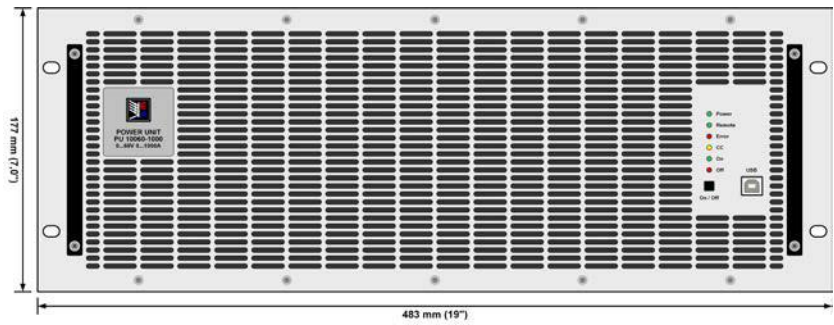


Front panel description PU 10000 4U

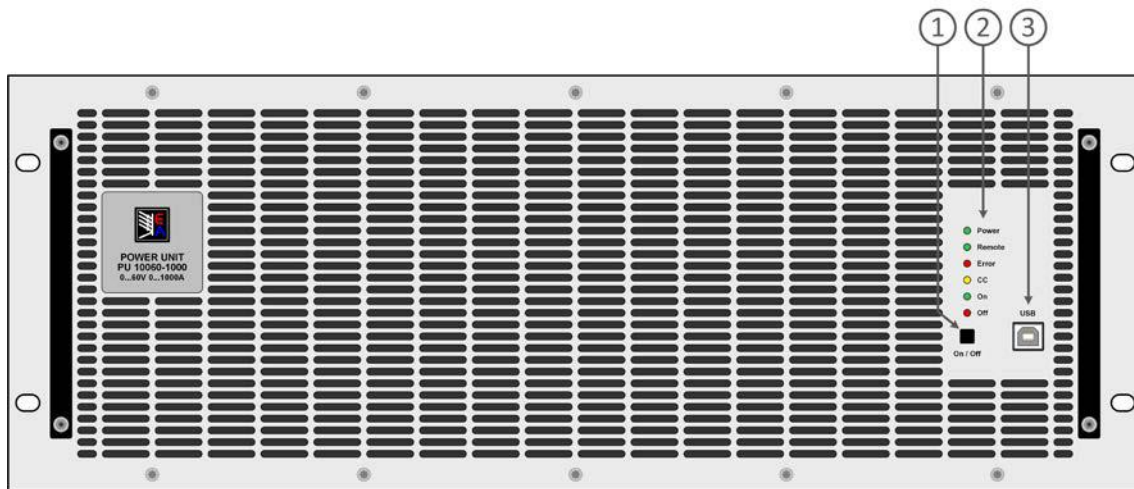

1. On / Off push-button
2. LED status display
3. USB Interface

Rear panel description PU 10000 4U ≥ 360 V

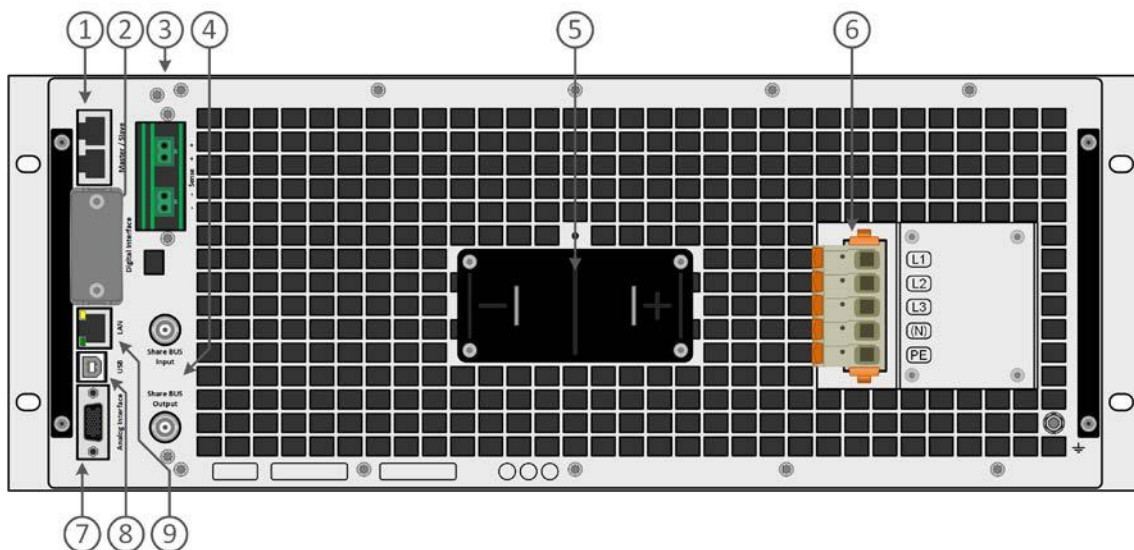


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC output connector (copper blades)
6. AC input connector
7. Connector (DB15 female) for isolated analog programming, monitoring and other functions
8. USB interface
9. Ethernet interface

Front panel description PU 10000 4U WC (water cooling option)



1. On / Off push-button
2. LED status display
3. USB Interface

Rear panel description PU 10000 4U WC (water cooling option)

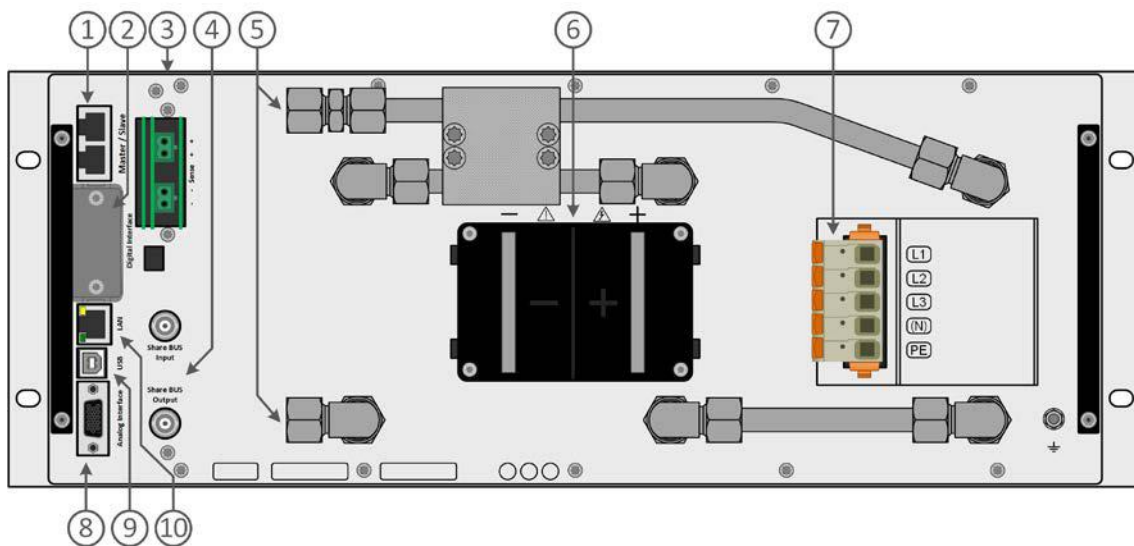

1. Master-Slave-Bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share-Bus connectors to set up a system for parallel connection
5. Inlets and outlets for water-cooling
6. DC output terminal (copper blades)
7. AC input connector
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

testforce

+1 (888) 880-6804
sales@testforce.com

EA Elektro-Automatik GmbH & Co. KG
Helmholtzstr. 31-37
41747 Viersen

Phone +49 2162 3785 - 0
Fax +49 2162 1623 - 0
ea1974@elektroautomatik.com

www.elektroautomatik.com

EA Elektro-Automatik Inc.
9845 Via Pasar
San Diego, CA 92126 USA

Phone +1 (858) 836 1300
sales@elektroautomatik.com

www.eapowered.com

